

PERMA-CLEAN® filter cartridges with GORE-TEX® ePTFE membrane.

CHEMCO

3225 Commercial Avenue
Northbrook, IL 60062-1920
Phone (800) 323-0431
Fax (800) 336-7706

West Coast Branch:
11280 Riverside Suite B
Mira Loma, CA 91752
Phone (800) 585-4911
Fax (702) 651-0502


WHAT THE NUMBERS SAY ...

Anybody can make extraordinary claims, but if they're not backed by solid evidence they're meaningless. As you can see, PERMA-CLEAN filter cartridges are backed by some impressive numbers.

CONSISTENTLY LOW PRESSURE DROP

At airflows of 500 cfm per cartridge, PERMA-CLEAN filters allow your powder booth to operate at low pressure drops while maintaining consistent airflow. Consistently stable airflow results in optimum booth conditions for greater powder transfer efficiency and increased productivity.


Average Pressure Drop vs Cartridge Type

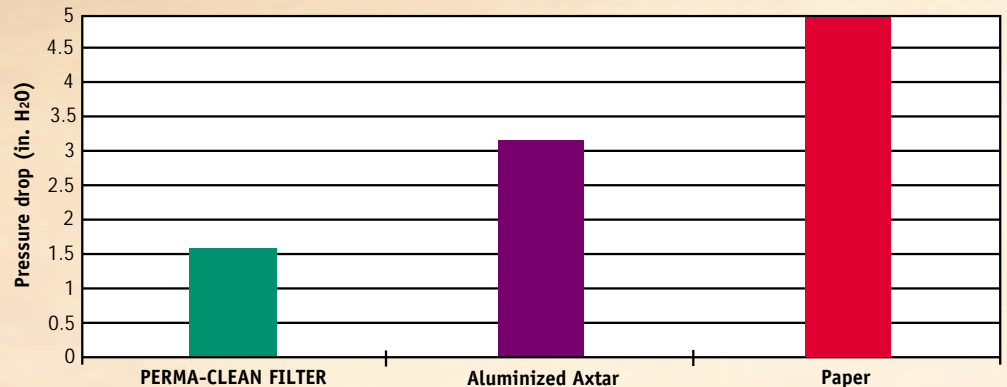

LESS POWDER RETENTION

PERMA-CLEAN filter's slick GORE-TEX ePTFE membrane offers a non-linting, easy-release surface that results in minimal powder build-up on the cartridge pleats. Non-linting ensures that reclaimed powder will be uncontaminated. Easy release means you throw out less valuable coating medium at filter change out.

Average Powder Retained vs Cartridge Type

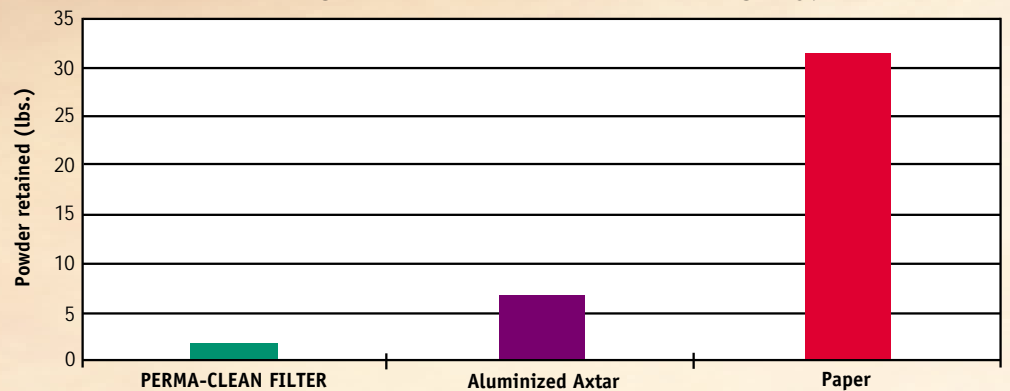

GREATER EFFICIENCY

High-efficiency filtration begins the moment you install a PERMA-CLEAN filter cartridge ... no seasoning required. The filter's ability to capture submicron particles reduces downstream duct contamination and extends the life of your final filters.

Media Efficiency vs Particle Size at 10 fpm

